

Infinity Effects Spray Stone™



Introducing our revolutionary Infinity Effects Spray Stone™ System, a highly advanced solution for stone coatings. In partnership with our Infinity Effects Spray Stone™ machine offers superior flexibility and adaptability compared to traditional methods. Say goodbye to surface cracking and compromised structural integrity.

Our Infinity Effects Spray Stone™ system is incredibly versatile, suitable for a wide range of surfaces and applications. Enhance the appearance of exterior or interior walls, industrial flooring, decorative flooring, metal beams, plastic PVC gutters, kitchen countertops, doors, or timber fencing with ease. Enjoy exceptional durability and hardness.

Thanks to our dedicated team and skilled chemists, we have transformed stone coatings into a groundbreaking innovation. Our Infinity Effects Spray Stone™ system incorporates advanced technology and sustainable practices.

Our Infinity Effects Spray Stone™ is more than just a coating. It dries quickly, has no odor, and is safe for the environment. Achieve realistic stone effects with a wide range of color options. It is resistant to mold, mildew, alkali, water, UV rays, weather conditions, and chemicals. It also offers excellent fire resistance.

Our coating is washable, resistant to scuffs, non-fading, and highly durable. Enjoy easy application, extensive coverage, and minimal maintenance. Unlike real stone or traditional ceramic, our Infinity Effects Spray Stone™ system eliminates safety concerns.

Experience the limitless possibilities of our Infinity Effects Spray Stone™ System. It's a game-changer in the world of stone coatings, offering exceptional performance and reliability.

COMPARISON

	IE Spray Stone	Exterior Wall Paint	Pebble Dashing	Render	Stucco
Non Fade	✓	✓	✗	✗	✓
Anti Cracking	✓	✗	✗	✗	✗
No Overlapping	✓	✗	✗	✗	✗
Anti-Bacterial	✓	✓ / ✗	✗	✗	✗
Eco - Friendly	✓	✓ / ✗	✗	✗	✓ / ✗
Low Material Wastage	✓	✓	✗	✗	✗
Easy Application	✓	✓	✓	✗	✗
Easy Maintained, Cleaned	✓	✓	✗	✗	✗
Choice Of Texture	✓	✗	✗	✓	✗
Notes:	10 - year service guaranteed (Recoating & Patch Repair Simple)	2 - 5 year service life. (Paint Peels & Flakes Over-Time, Requires Recoating Often)	10 - year service life. Pebble dash loses waterproofing qualities quickly leading to cracks.	Plaster is mainly weak in tension & flexural strength, liable to cracking. High material Wastage.	Stucco can not be recoated & must be shotblasted off before recoat. Labour intensive installation.

Order your Infinity Effects Spray Stone™: directly from Infinity Effects or through our global distribution agents. Please note that all Infinity Effects products are sold according to our Standard Conditions of Sale. While we aim to provide helpful advice, we can only guarantee results for uses explicitly confirmed in writing by Infinity Effects and the specified representative.

Infinity Effects Spray Stone™




Infinity Effects Spray Stone™ Colour Chart



Infinity Effects Spray Stone™



Infinity Effects Pigmentable Spray Stone™ Colour Chart

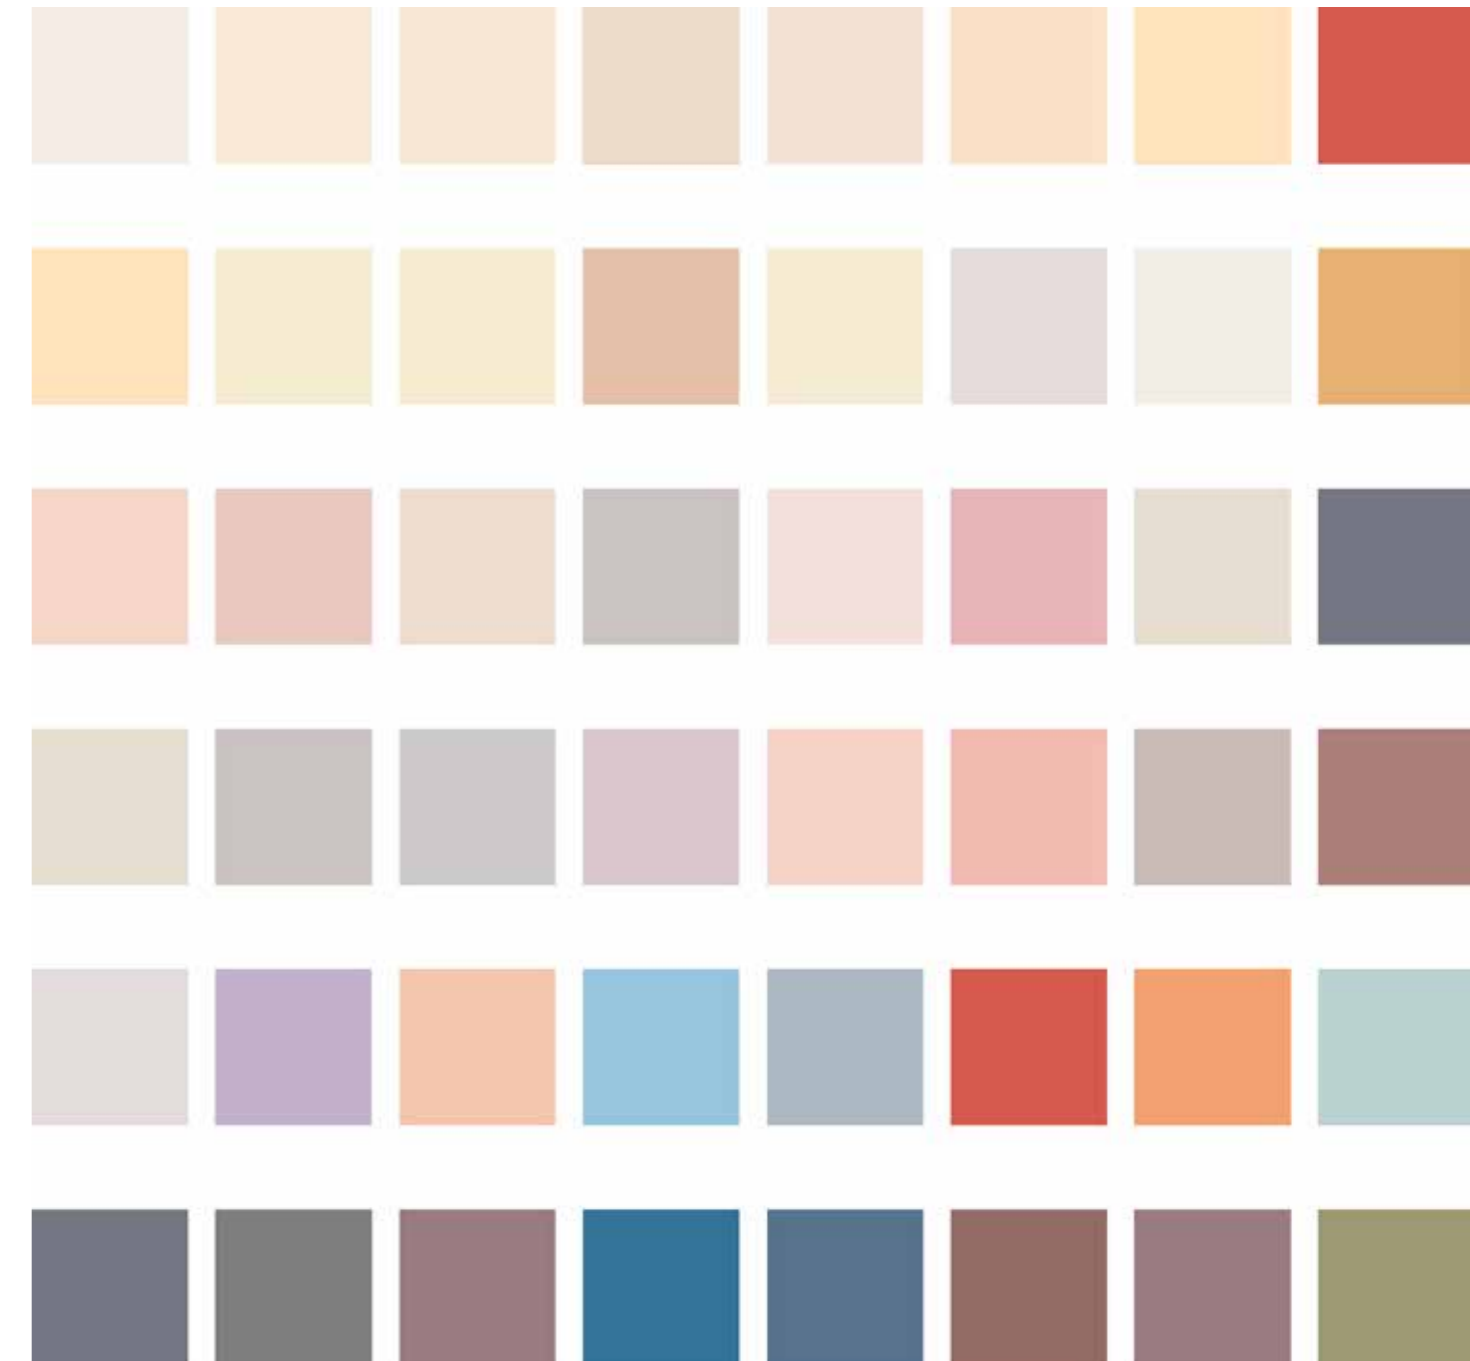

DISCLAIMER: Customers are advised to thoroughly read and adhere to the instructions provided to ensure the optimum finish and performance of our products. The information presented is based on results gained from experience and tests and is believed to be accurate. However, we do not accept liability for any loss or damage attributable to reliance on this information, as conditions of use may lie outside our control. Any deviation by the user from these instructions may affect the performance of the products, and therefore, such actions are not advised. In such circumstances, Infinity Effects will not be held responsible.

Users should always conduct sufficient tests to establish the suitability of any products for their intended applications. While we strive to ensure consistency of color in production, slight variations in shade may occur from batch to batch.

Note: If you are unsure about the compatibility of Infinity Effects Coating with the substrate surface, we strongly recommend conducting a small test in a discreet area before applying it to the entire floor. This precaution will help ensure a successful and satisfactory outcome.